


Thanks for choosing JETBeam Flashlight. Please read the operation manual carefully before using your light.

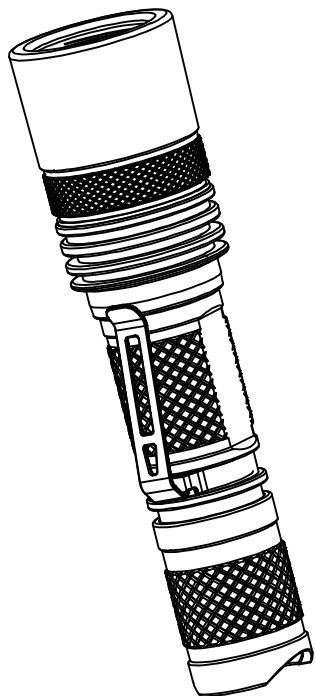

## Features

- Premium CREE XM-L T6 LED
- Max output of 650 lumens
- Powered by 2\*CR123 or 1\*18650 batteries
- High performance optical system
- Built-in advanced power management circuit
- Reverse polarity protection
- Adopts JETBeam agility switch system
- Two brightness levels
- Equips stainless steel removable tactical clip
- IPX-8 Waterproof (submersible up to 2 meters)
- Impact-resistant accords with US MIL-STD-810F (1.5 meters)
- Tailstand as a candle

## Specifications

LED: CREE XM-L T6

Reflector: Aluminum reflector

Lens: Coated mineral glass

Material: Aero grade aluminum alloy

Finish: HA III Military grade hard anodized

Maximum output: 650 lumens

Maximum runtime: 7 hours 45 minutes

Battery: 2\*CR123 or 1\*18650

Dimensions: Head Diameter 34mm

Tube Diameter 25.4mm

Total Length 143mm

Weight: 129g (without battery)

Waterproof: IPX-8 standard waterproof

FL1 STANDARD	MODE 1	MODE 2
	<b>650*</b> LUMENS	<b>100</b> LUMENS
	<b>1h30min</b>	<b>7h45min</b>
	<b>189m(Maximum peak beam intensity)</b>	
	<b>9000cd(Maximum beam distance)</b>	
	<b>1.5m</b> (Impact Resistant)	
	<b>IPX-8, 2m</b> (Waterproof AND Submersible)	

\*After working for about 5 minutes in high mode(650 lumens), the BC25 will automatically activate and reduce the output to approx.430 lumens.

### NOTICE

Stated data has been measured according to the international flashlight testing standards ANSI/NEMA FL1 by using two SYSMAX CR123 batteries in the laboratory. The data may vary due to different battery usage and environment conditions.


# BC25

## Operation Manual

## Operation instructions

### Battery installation

1. Unscrew and remove the tailcap.
2. Insert one 18650 Li-ion cell or two CR123 batteries with the positive (+) end pointing forward.
3. Replace the tailcap and fasten tightly.

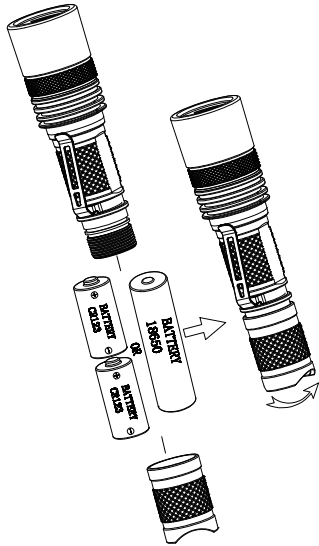

### Momentary ON/OFF

Press the switch partway down and hold to enter Momentary mode. Release the switch to turn the light off.

### Constant ON/OFF

Press the switch all the way down and release within one second to access Constant mode. Press switch to turn the light off.

### Mode Switching

The BC25 employs JETBeam's new "Agility Switch System" providing easy and intuitive access to brightness modes.

**High Mode:** With the light turned on, completely tighten the bezel (flashlight head) to access high mode. In high mode, the BC25 will emit 650 lumens. After working for about 5 minutes in high mode, the BC25 built-in temperature protection circuit will automatically activate and reduce the output to approx.430 lumens(Mid Mode). If user wants to resume to high mode, simply turn off the BC25 and turn back on again, the light will resume Max output.

**Eco Mode:** With the light turned on, slightly loosen the bezel (flashlight head) to access eco mode. In eco mode, the BC25 can emit 100 lumens with a maximum runtime of up to 7 hours and 45 minutes.

### Maintenance

Clean the threads twice a year with a clean soft cloth and apply thin coat of silicone-based lubricant.

**NOTE:** DO NOT use petroleum-based lubricant as it may damage the O-rings.

## Warranty Service

All JETBeam products enjoy a warranty service after sale. Any malfunctioning products can be exchanged for replacements from local distributor/dealer within the first 14 days after receipt of the light. This product can enjoy free warranty service within 18 months from the date of purchase. After 18 months, the warranty covers labor cost and maintenance, with the exclusion on the cost of accessories or repair parts. The warranty is nullified in any of the following situations:

1. The product(s) is/are broken down, reconstructed and/or modified under unauthorized conditions.
2. The product(s) is/are damaged through improper use.
3. The product(s) is/are damaged by leakage of batteries.

Details of warranty service, please contact regional distributor/dealer or send an email to [service@jet-beam.com](mailto:service@jet-beam.com)

**SYSMAX** Ind.

SYSMAX Industry Co.,Ltd.  
Rm 1407-08, Glorious Tower,  
850 Dongfeng Road East,  
Yuexiu District, Guangzhou, Guangdong,  
China 510600

Tel: +86 20 83862000  
Fax: +86 20 83882723  
E-mail: [info@jet-beam.com](mailto:info@jet-beam.com)

